




Key Features:

- 1/3" SONY CCD SUPER HAD II
- 700 TVL
- 2.8-12 mm Lens
- 36 PCS IR LEDs
- DNR, HLC, BLC
- Day / Night
- Outdoor, Weather Proof
- 12VDC
- 2 Year warranty

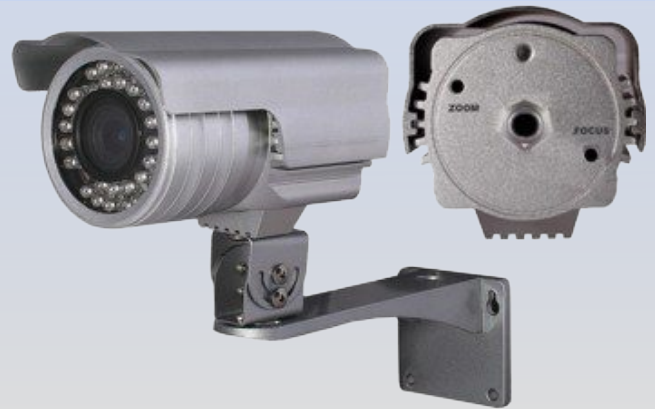

Specifications:

Pick up Element	1/3" SONY CCD SUPER HAD II
Effective Picture Elements (H*V)	NTSC: 1028(H)*508(V), PAL: 1024(H)*596(V)
Horizontal Resolution	700TV Lines
S/N Ratio	More than 48dB
Clock Freq. (MHz)	NTSC: 28636, PAL: 28375
Scanning System	2:1 Interlace
Mini. Illumination	0 Lux (with IR LED ON)
Synchronous System	Internal, Negative Synchronous
Auto Electronic	NTSC: 1/60s~1/100000s, PAL: 1/50s~1/100000s
Gama	0.45
IR	36 PCS IR LEDs
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Video Output	1Vpp, 75 Ohm
AGC	Auto
Power	12VDC(+/-10%), 400mA
Lens	2.8-12mm Varifocal Lens
Dimension	146x83(mm)
Weight	900g
Storage Temp.	-30~+60 Degree
Operating Temp.	-10~+45 Degree